
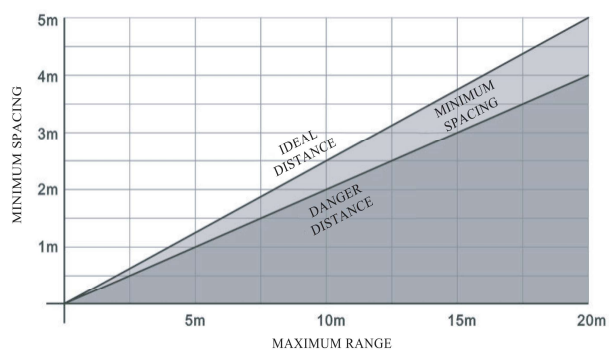
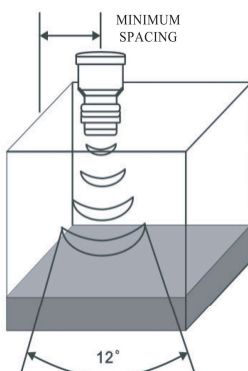
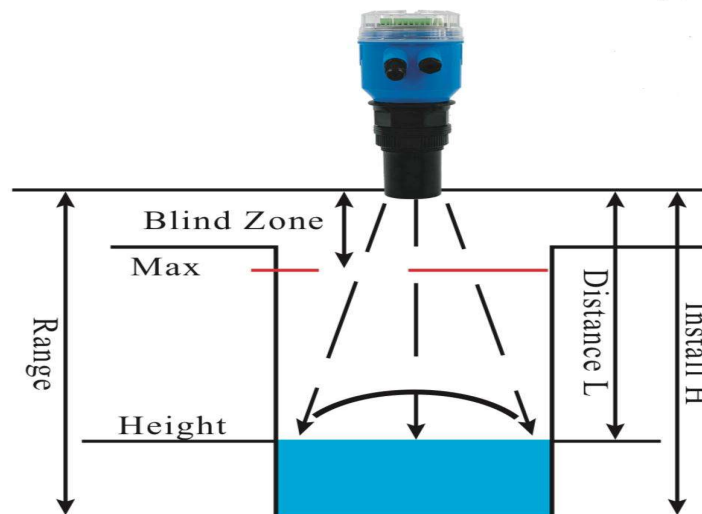


MODEL:EchoT-UB-210

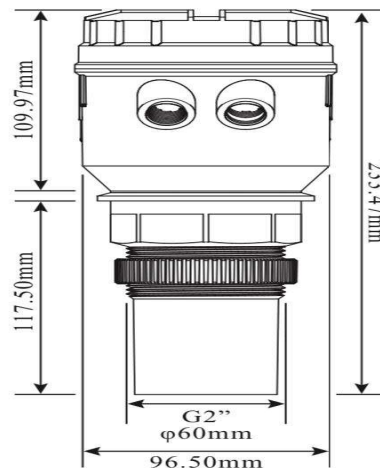

Specifications-

Product	Ultrasonic Level Transmitter
Range	10m
Beam angle	12°
Blind zone	400mm
Resolution	1mm
Accuracy	±0.5%F·S
Output signal	4~20mA 2 wire
Operating temp.	-20~50°C 0-95%RH
Power Supply	DC 18-28 @0.6w
Cable way	M16x1.5
Protection	IP65
Display	LCD 1.9"
Housing	ABS/PP
Application	Water level measuring

MANUAL—

- Functions

The factory default password is 00000, please keep it in mind if you change it.

Mount	Mount Height	Distance from the bottom plane of the probe to the bottom of the water, unit m.	
	Level Val	After the probe is fixed, input the actual liquid level height in m.	
	Environment	Open/Close	
Output	Current Test	4-20ma Test	
	Current Range	Out Low	To 4mA [default 00.000]
		Out High	To 20mA [default 10.000]
Display	Unit	null/m/cm/mm/yd/feet/inch [Default m]	
	Point	0/0.0/0.00/0.000/0.0000[Default 0.000]	
	Convert	Displays the magnification factor [Default 1]	
	Contrast	Display screen contrast ratio [Default 40]	
	Backlight Delay	Backlight on-screen time in s[Default 0]	
Probe	Filtering	NONE/Rapidly/Fast/Normal/Stable/Steam/Foam/Stir	
System	User set	Modify menu password [Default 00000]	